



LED Ceiling Light

Elegant, flicker-free LED ceiling light with an indirect corona-effect

LED Ceiling Light

Verbatim LED ceiling lights offer a uniform light distribution suitable for general lighting application. Available in two colour temperatures (3000K and 4000K) and diameters (320mm and 500mm), they feature a perfectly even light-emitting surface with two different diffuser finishes that both pass the 850°C glow wire test.

The elegant, flicker-free ceiling light features an optional indirect corona or halo effect. The ceiling light can be suspended from the ceiling with the corresponding suspension kit. An option for DALI-dimming is also available.

The protection class of IP40 prevents the penetration of solid objects such as dust or insects. Paired with a long lifetime of 50.000h, the luminaire guarantees low maintenance and cleaning cost. Full metal housing guarantees efficient thermal management. A narrow binning of SDCM<3 and excellent energy efficiency makes it a perfect replacement for ceiling lights with conventional technologies.

Available in two housing colours, white (RAL9016) or silver (RAL9006).

Application

Suitable for general lighting in public and commercial buildings, retail and hospitality.



Without indirect corona-effect




With indirect corona-effect


The elegant, flicker-free ceiling light features an indirect corona or halo effect that makes the luminaire appear to 'float' on the ceiling, smoothing the contrast between the light-emitting surface and the background or ceiling it is installed onto.

If preferred, the corona effect can be removed by applying the covering magnetic clip system which is provided with the luminaire.

Light shades covering indirect corona-effect.

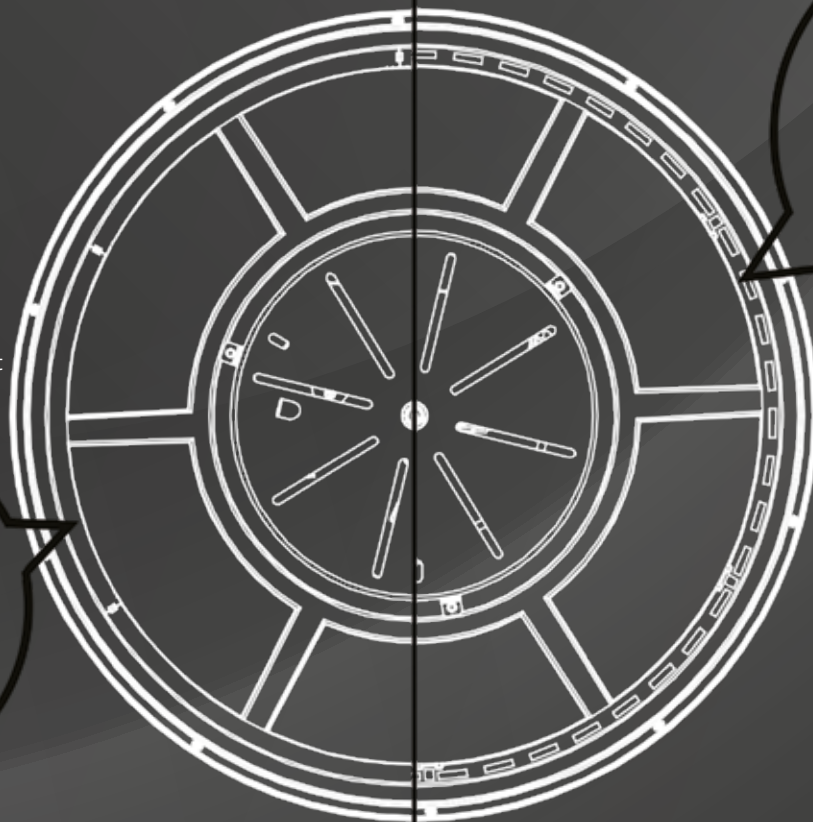

Light shades removed to allow indirect corona-effect.





- Long lifetime of 50,000 hours
- Luminous efficacy of up to 100lm/W
- Available in two different diameters (Ø320mm and Ø500mm) and two different CCTs (3000K and 4000K)
- Narrow binning of SDCM ≤3
- PC diffuser passing 850°C glow wire test
- Flicker-free driver. DALI option available
- With indirect corona-effect
- Silver version includes driver with DIP switch to reduce output luminous flux by 50%



Product Number	Wattage (W)	Luminous Flux (lm)	CCT (K)	UGR	Housing colour	Diameter (mm)	Product Weight (g)
52290	18	1800	3000	Opal (>19)	White	320	1845
52291	35	3500				500	3070
52292	18	1850	4000			320	1845
52293	35	3600				500	3070
52294	18	1450	3000	Prismatic (<19)	White	320	1875
52295	35	2800				500	3130
52296	18	1500	4000			320	1875
52297	35	2900				500	3130
52968	18	1800	3000	Opal (>19)	Silver	320	1845
52969	35	3500				500	3070
52970	18	1850	4000			320	1845
52971	35	3600				500	3070
52972*	18	1450	3000	Prismatic (<19)	Silver	320	1875
52973*	35	2800				500	3130
52974*	18	1500	4000			320	1875
52975*	35	2900				500	3130

Accessories
52936 - Verbatim Suspension Kit for LED Ceiling Light

52934 Tridonic LED DALI Driver for 320mm LED Ceiling Light
52935 Tridonic LED DALI Driver for 500mm LED Ceiling Light

* available on request